W082232

WORKPRO

OPERATOR'S MANUAL
60" x 22" ADJUSTABLE HEIGHT WORKBENCH WITH PEGBOARD

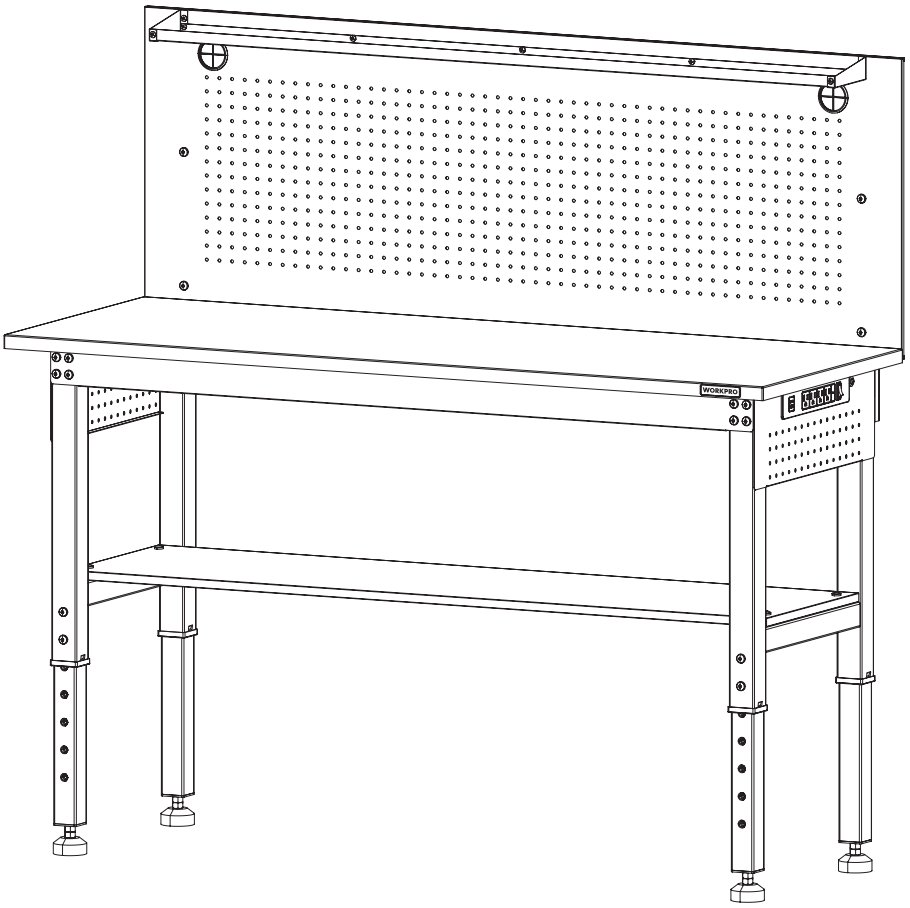

USE PRECAUTION
For your safety

INSTRUCTION MANUAL
Read and understand

EYE PROTECTION
Must be worn

PROTECTIVE GLOVES
Must be worn when assembly

CAUTION: Read and follow all Safety Rules and Operating instructions before first use of this product.
NOTE: Ensure all components are present. If any components are missing, do not proceed with assembly. Please send an email to service@greatstartools. com or call 877- 876 - 7562.

SAVE THIS MANUAL FOR FUTURE REFERENCE

Intertek
5014983

Distributed by:
Hangzhou GreatStar Industrial Co., Ltd.
No.35 Jiuhuan Road, Shangcheng District,
Hangzhou 310019, China
www.greatstartools.com
MADE IN CHINA

TABLE OF CONTENTS

Safety Information ---------- 3
Specifications ----------4
Package Contents ----------5
Assembly ----------6-10
Operation ---------- 11
Care and Cleaning ---------- 12
Customer Service ---------- 12

FOR YOUR SAFETY: CAREFULLY READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE USE.

SAFETY INFORMATION

To reduce the risk of serious injury, read and follow the safety instructions below before assembling and using this product.

1. THIS PRODUCT IS INTENDED FOR INDOOR USE ONLY.

2. THIS PRODUCT IS NOT DESIGNED FOR COMMERCIAL NOR INDUSTRIAL USAGE.

⚠ CAUTION!

- Check all nuts and bolts periodically for tightness. When required, tighten them.
- DO NOT leave children unattended near this product.
- Keep the product on level surfaces. The product could become unstable and it may tip over if stored or moved on an uneven surface, which may cause personal injury, death or product damge.
- DO NOT alter this product in any manner. For example, do not weld external bar locks or attach electrical equipment. This may cause product damage or personal injury.
- Any assembly or maintenance of the product must be carried out by adults only.
- Use at least two people to move, assemble or install this workbench. Failure to do so can result in personal injury or product damage.
- DO NOT stand on the product and do not use it as scaffold.

3. EXTENSION CORD:

- Only use a three-wire extension cord with all three prongs intact. Never remove the round grounding prong.
- Extension cord must be connected to a 125Volt GFCI protected outlet with proper ground. If GFCI outlet is not available, use an extension cord with GFCI protection built in.
- Check the insulation and plugs of extension cord before using. Do NOT use cord if it is worn or damaged.
- Do NOT overload extension cord.
- Do NOT connect extension cord to outlet that also supplies critical safety equipment with power.
- Make sure the power supply cord is unplugged before any servicing or cleaning.

4. ELECTRICAL SHOCK HAZARD:

- Do not plug cord into outlet with wet hands.
- Do not use this workbench near a bathtub, a shower, or a swimming pool.
- Workbench plugs must match the outlet.
- Never modify the plug in any way.
- Unmodified plugs and matching outlets will reduce the risk of electric shock.
- Avoid body contact with earthed or grounded surfaces. There is an increased risk of electric shock if your body is earthed or grounded.

5. THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES.

Operation is subject to the following two conditions:

1) This device may not cause harmful interference, and
2) This device must accept any interference received, including interference that may cause undesired operation.

"Please note that changes or modifications of this product are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment."

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

SPECIFICATIONS

Maximum load of workbench	2000lbs
Adjust height of workbench without pegboard	26 5/8"-36 1/2"
The length x width of table	60" x 22"
Maximum output of power strip	1875 watts
USB Current	5V DC, 2.1A MAX

PACKAGE CONTENTS

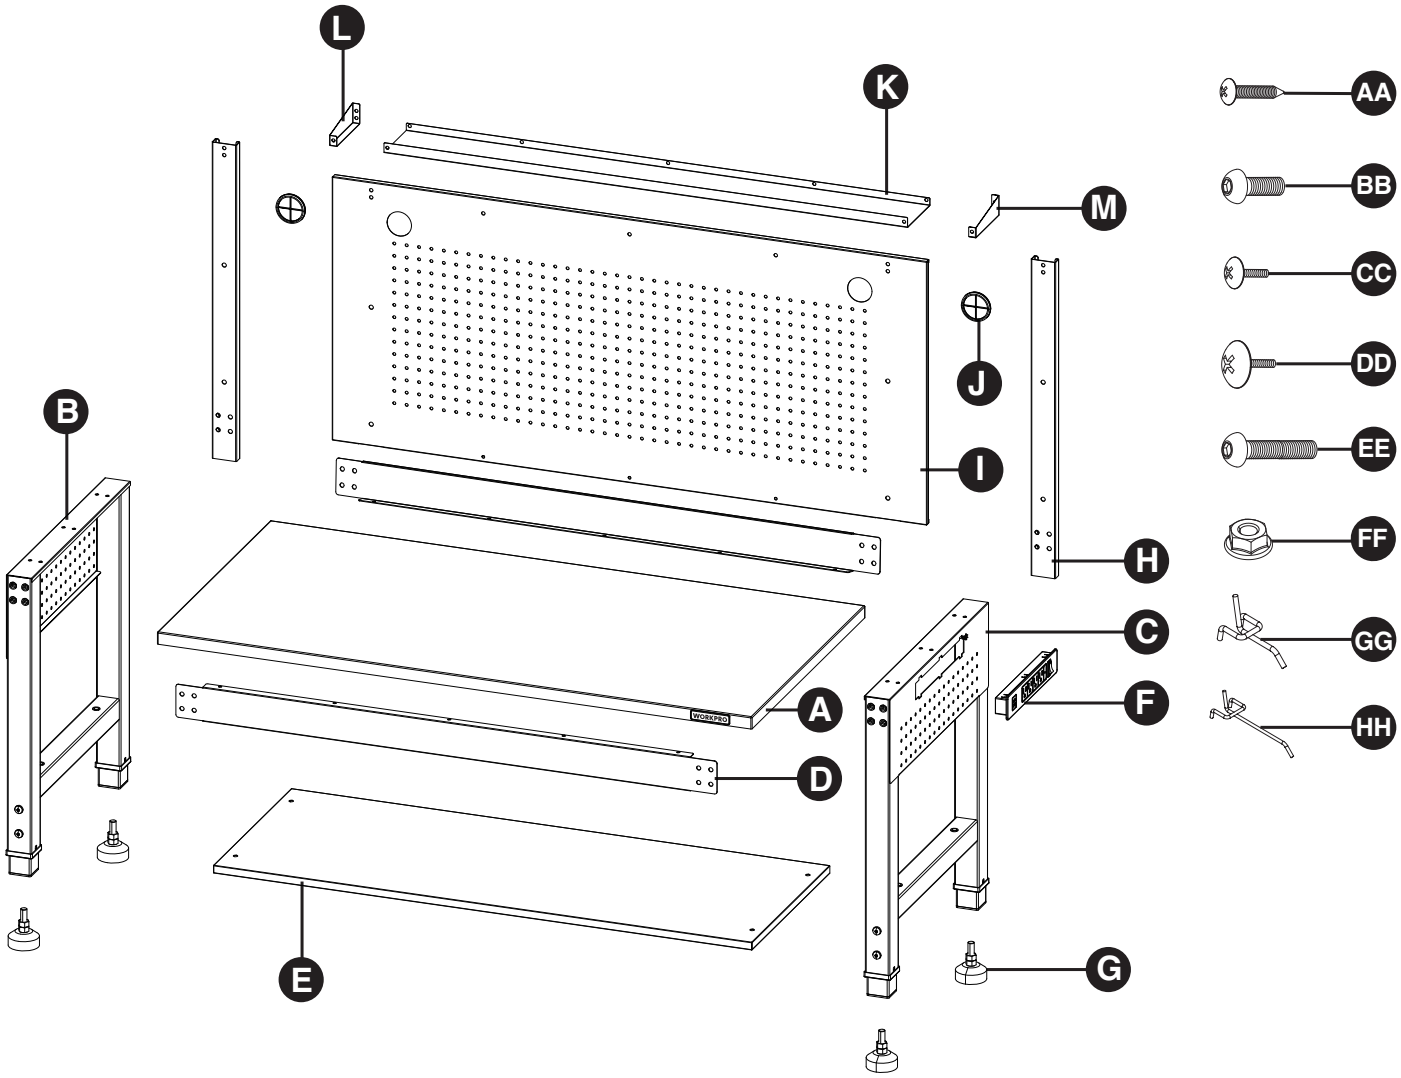

PART	DESCRIPTION	QTY
A	Wood Top	1
B	Left Leg	1
C	Right Leg	1
D	Beam	2
E	Bottom Shelf	1
F	Power Strip	1
G	Leveling Foot	4
H	Vertical Support	2
I	Pegboard	1
J	Cable Grommet	2
K	Top Shelf Bottom Panel	1

PART	DESCRIPTION	QTY
L	Top Shelf Left Panel	1
M	Top Shelf Right Panel	1
AA	#5x20 mm Screw	27+ 2(Spare)
BB	M8x15 mm Screw	24+ 2(Spare)
CC	M6x10 mm Screw	9+ 2(Spare)
DD	M6x10 mm Truss Head Screw	1+ 1(Spare)
EE	M8x40 mm Screw	4+ 2(Spare)
FF	M8 Nut	4+ 2(Spare)
GG	2" Hook	5
HH	4" Hook	5

TOOLS REQUIRED (NOT INCLUDED):

5mm Hex Key

Protective Gloves

PH2 Screwdriver

17mm Wrench

13mm Wrench

Power Drill With Long Screw Driver

ASSEMBLY

NOTE:
Do not tighten all the screws before the STEP 3.

NOTE:
Assemble on a flat surface. A piece of cardboard is recommended to keep the product from being scratched during assembly.

STEP 1: INSTALL THE LEVELING FOOT

- Screw four leveling feet (G) into the holes in the bottom of the legs (B&C) clockwise.

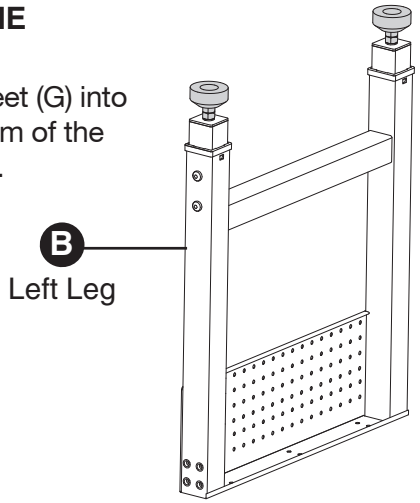

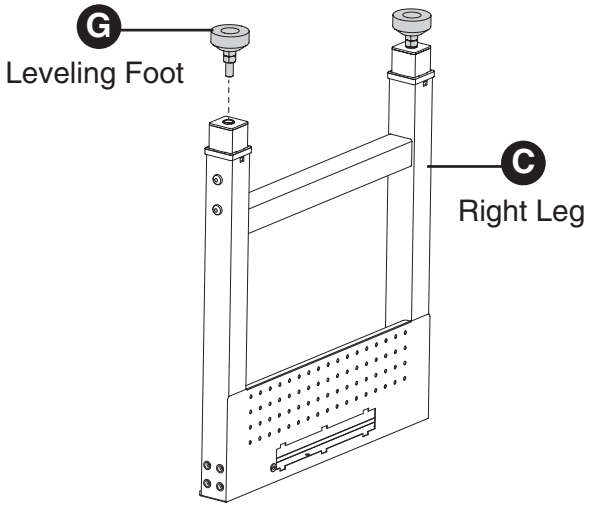

PART	B	C	G
DESCRIPTION	Left Leg	Right Leg	Leveling Foot
QTY	1	1	4

STEP 2: INSTALL THE BEAMS

- Attach one beam (D) to the legs (B&C) and tighten to desired tightness with 8pcs M8x15mm screws (BB) using a 5mm hex key.
- Repeat the above step to install the other beam (D).

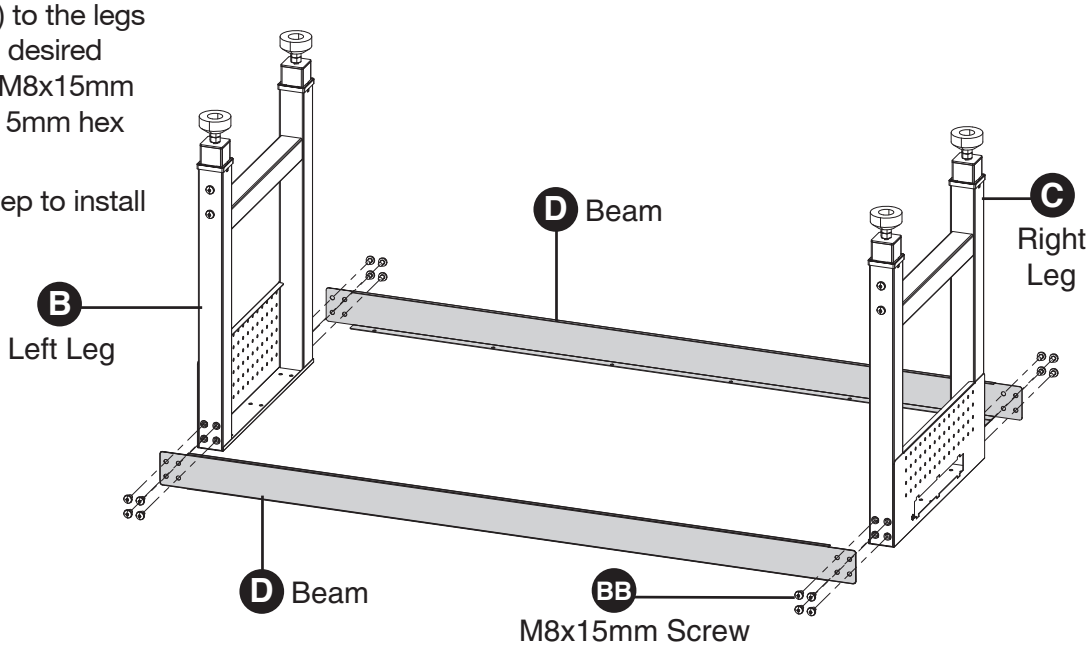

PART	B	C	D	BB
DESCRIPTION	Left Leg	Right Leg	Beam	M8x15mm Screw
QTY	1	1	2	16

ASSEMBLY

STEP 3: ATTACH THE WOOD TOP

- Place wood top (A) facing down on a flat surface with positioning labels facing upward. Use soft moving blanket or packaging material to protect the top during assembly.
- Align the legs with the corresponding positioning labels and install the legs (B&C) & beams (D) on the wood top (A) using 24 pcs #5x20mm screws (AA). **Tighten all the screws competely.**

NOTE:

- Since the wood is hard, a power with leg screw driver bit is recommend when assembling.
- We recommend that the leg with power strip is assembled close to side of the brand "WORKPRO". However, you can adjust the assembly position of the leg with power strip as you need.

PART	A	AA
DESCRIPTION	Wood Top	#5x20 mm Screw
QTY	1	24

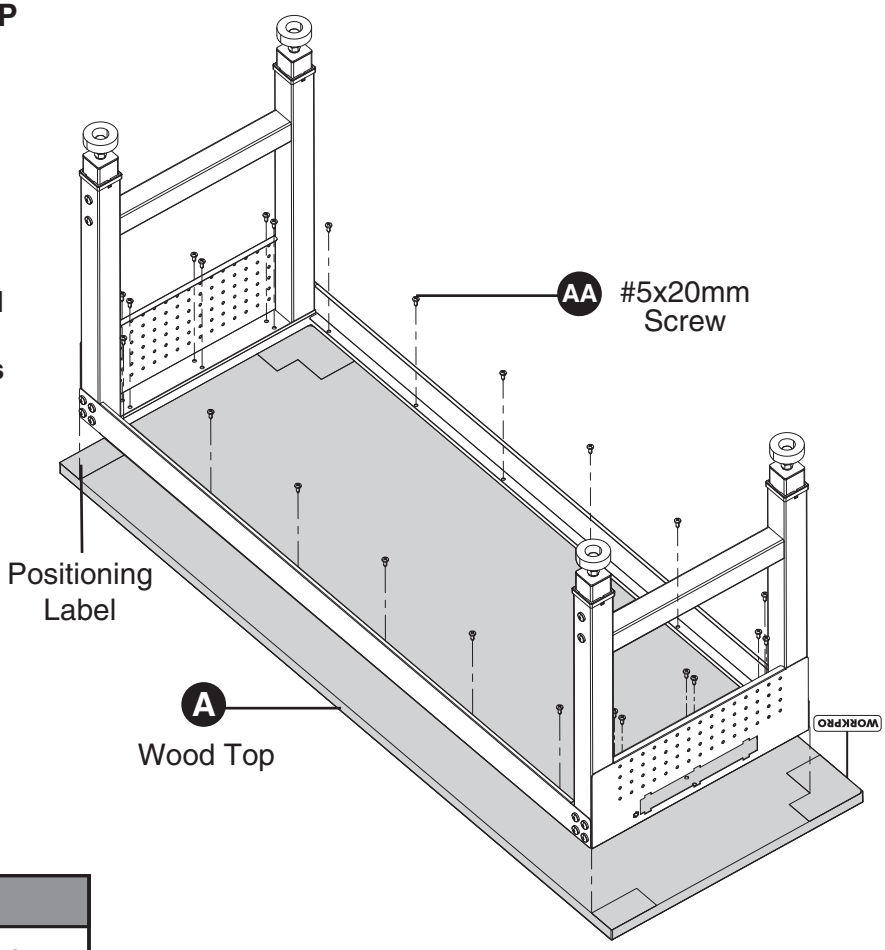

Align legs with positioning labels

STEP 4: INSTALL THE VERTICAL SUPPORT

- Standing at the rear of the beam close to the edge of the workbench. Remove 8pcs screws installed on the beam (D) by a 5mm hex key.
- Position the vertical support (H) over the holes on the workbench.
- Secure with 4 pcs M8x15mm screws (BB) and tighten with a 5mm hex key.
- Repeat the above step to install the other vertical support (H). **Do not fully tighten the screws yet.**

PART	H	BB
DESCRIPTION	Vertical Support	M8x15mm Screw
QTY	2	8

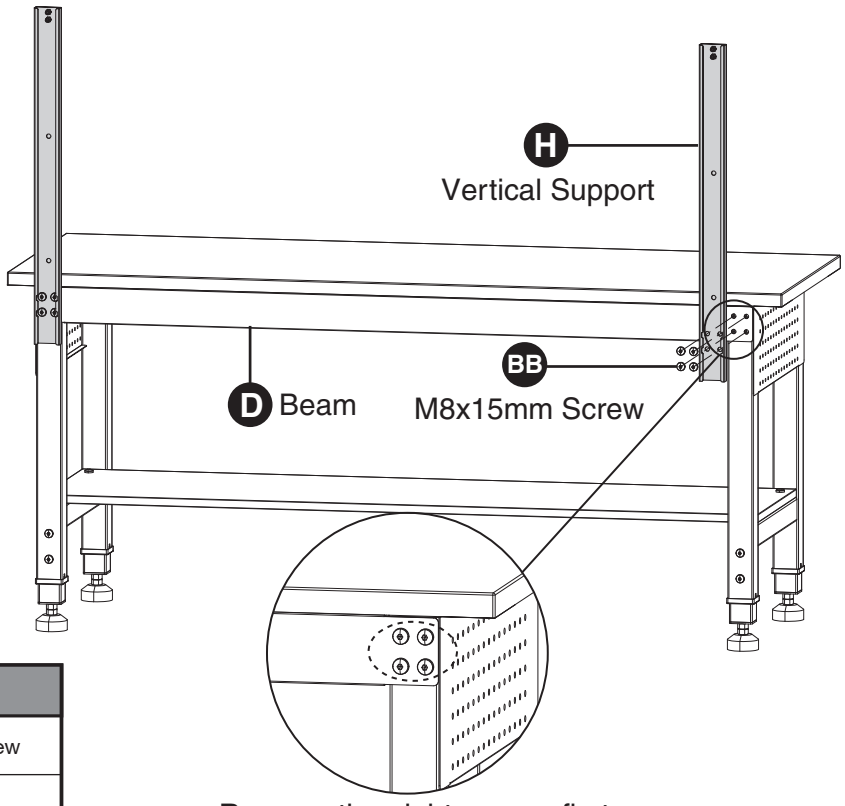

Remove the eight screws first.

ASSEMBLY

STEP 5: INSTALL THE PEGBOARD

- Position the pegboard (I) over the vertical supports (H).
- Secure the pegboard (I) to vertical supports (H) with 4pcs M8x15mm screws (BB) and 4pcs M8 nuts (FF) by a 5mm hex key and a 13mm wrench.

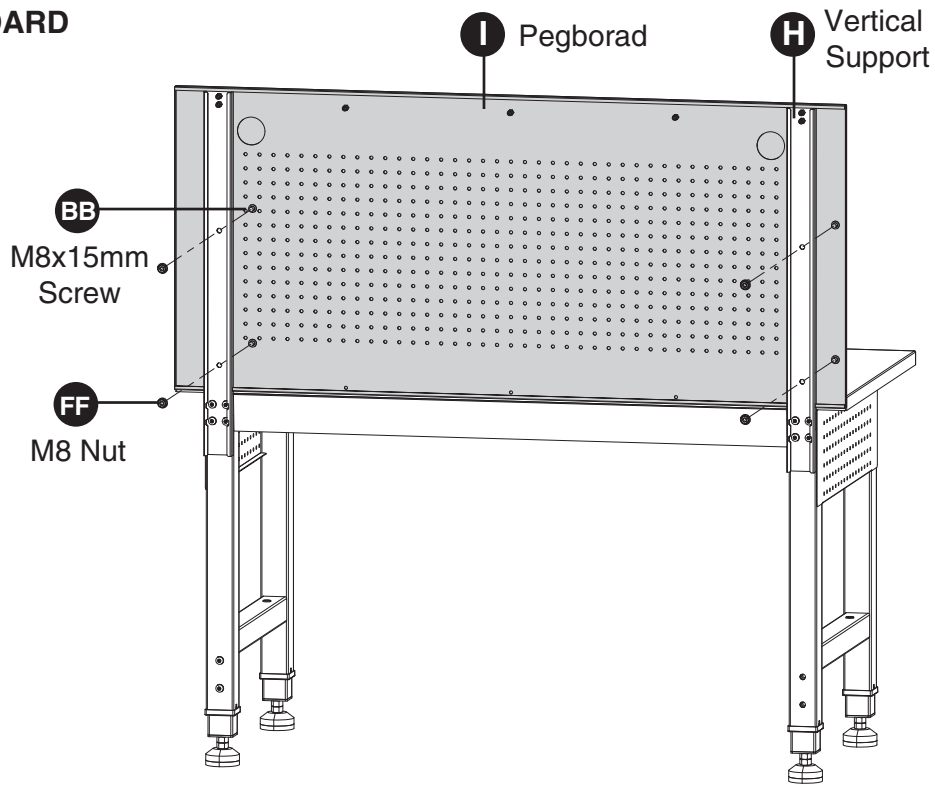

PART	I	BB	FF
DESCRIPTION	Pegborad	M8x15mm Screw	M8 Nut
QTY	1	4	4

STEP 6: INSTALL THE TOP SHELF

- Attach the top shelf side panels (L&M) to the pegboard (I) with 2pcs M6x10mm screws (CC) as the picture shows, and tighten to desired tightness with a hey key.
- Slide the top shelf bottom panel (K) to the side panels (L&M) as the picture shows, and secure with 7pcs M6x10mm screws (CC). **Tighten all the screws completely from step 4 to step 6.**

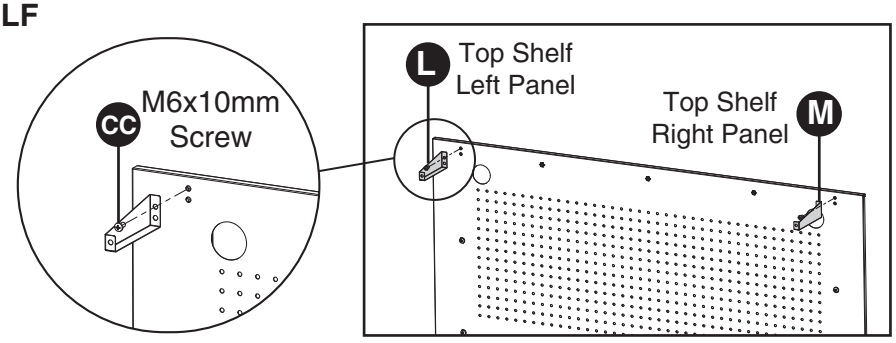

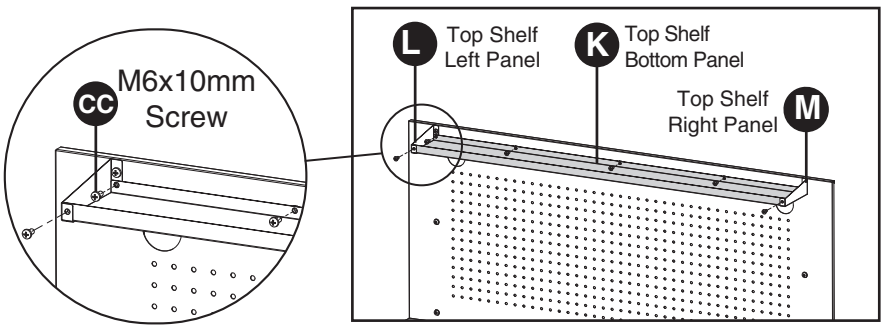

PART	K	L	M	CC
DESCRIPTION	Top Shelf Bottom Panel	Top Shelf Left Panel	Top Shelf Right Panel	M6x10mm Screw
QTY	1	1	1	9

ASSEMBLY

STEP 7: TIGHTEN THE PEGBOARD

■ Attach the pegboard (I) to the wood top (A) with 3pc #5x20mm screws (AA) and fully **tighten to desired tightness.**

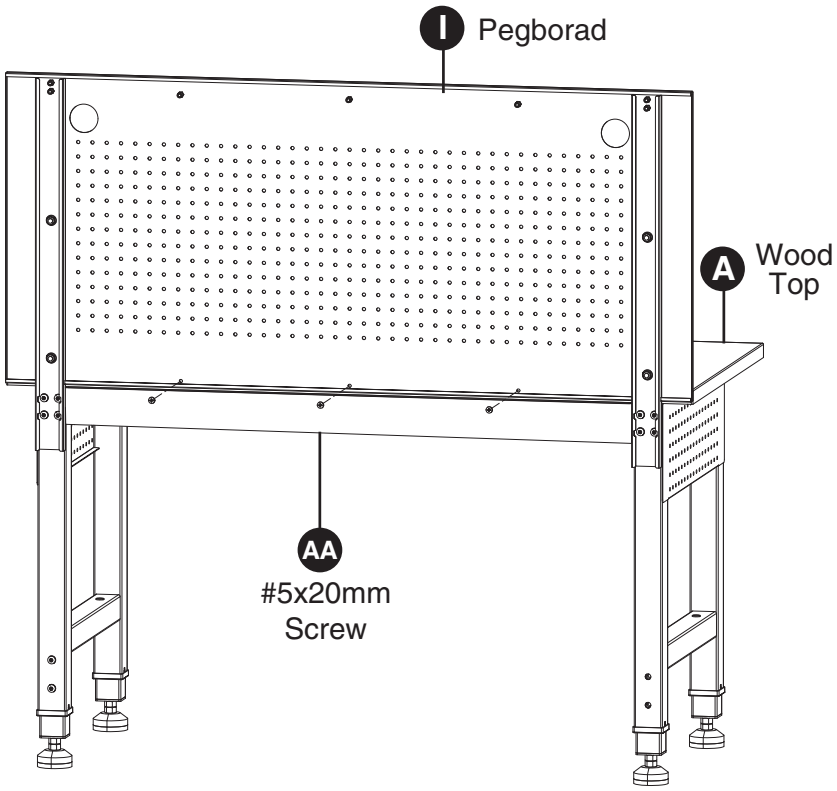

PART	AA
DESCRIPTION	#5x20mm Screw
QTY	3

STEP 8: INSTALL THE CABLE GROMMET

■ Align the cable grommet (J) with the hole on the pegboard (I), then fully press into the hole until its double retaining flanges lock onto both side of the metal plate.

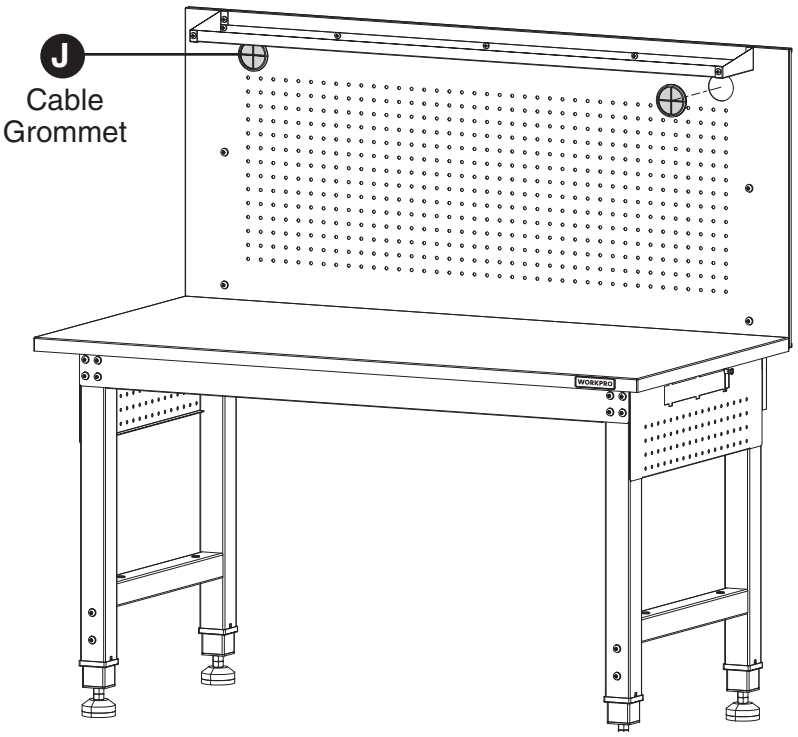

PART	J
DESCRIPTION	Cable Grommet
QTY	2

ASSEMBLY

STEP 9: INSTALL THE BOTTOM SHELF

- Secure the bottom shelf (E) to the legs (B&C) with 4pcs M8x40mm screws (EE) and fully tighten to desired tightness.

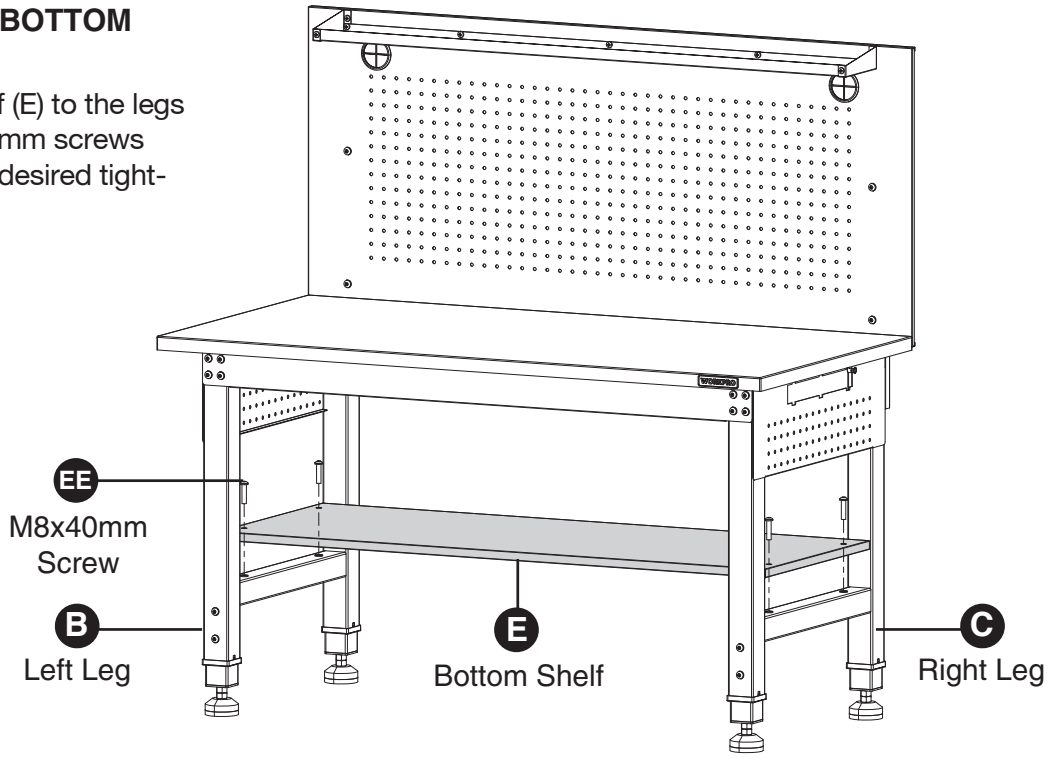

PART	E	EE
DESCRIPTION	Bottom Shelf	M8x40mm screw
QTY	1	4

STEP 10: INSTALL THE POWER STRIP

- Slide the power strip (F) the right leg (B) and push it to the left, then tighten with a M6x10mm truss head screw (DD) by a PH2 screwdriver.

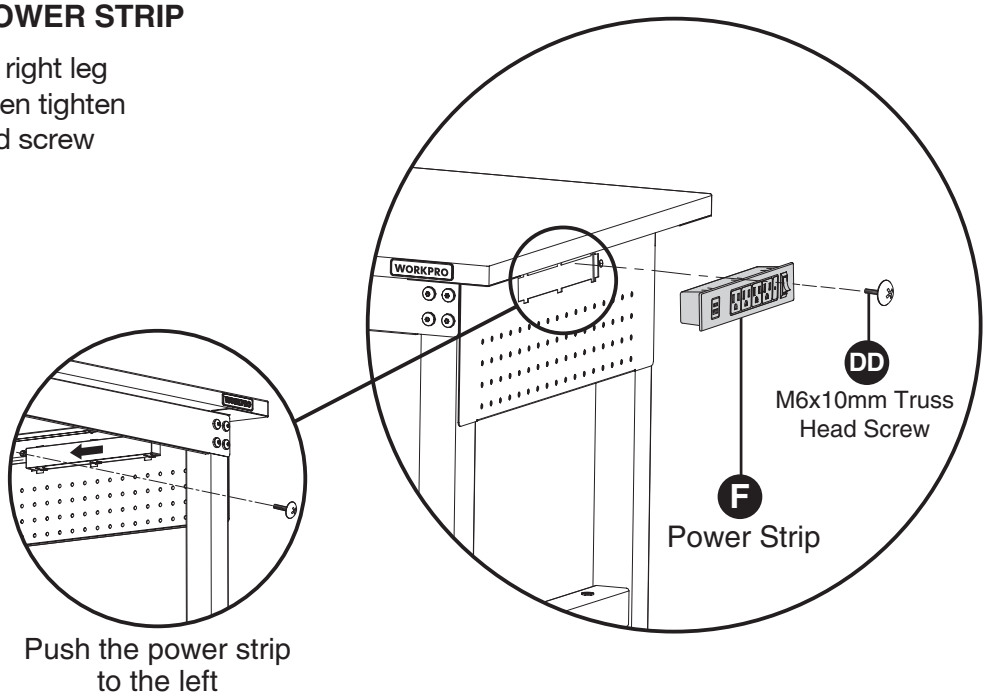

PART	F	DD
DESCRIPTION	Power Strip	M6x10 mm Truss Head Screw
QTY	1	1

OPERATION

ADJUST THE HEIGHT OF WORKBENCH

- Carefully put the workbench to its side position.
- Adjust the position of screws by a 5mm hex key to acquire suitable height.

NOTE:
The adjustable height range of the workbench is 26 5/8"-36 1/2".

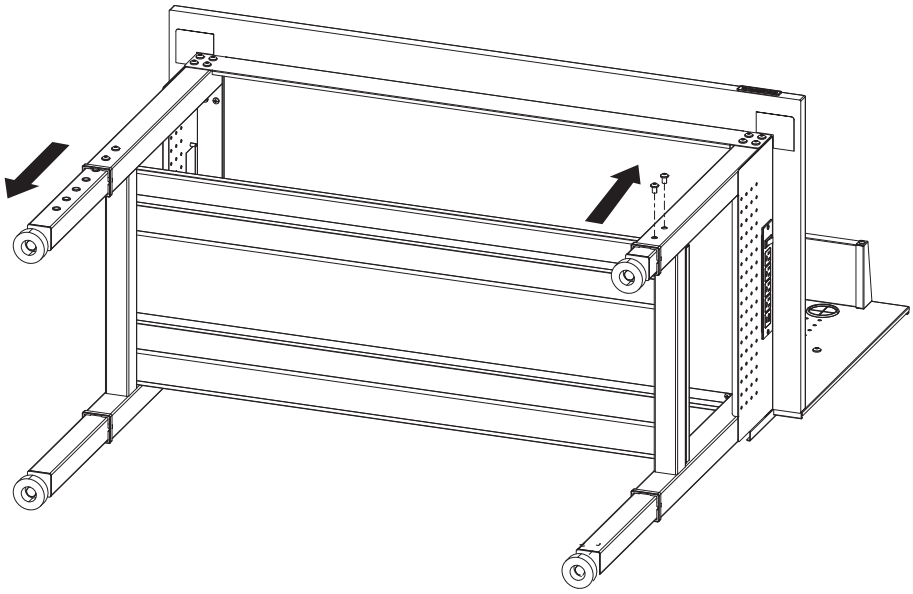

ADJUST THE LEVEL OF WORKBENCH

- Easily leveled with its height-adjustable leg feet. Rotate the foot to the suitable position and lock with the corresponding nuts by a 17mm combination spanner.

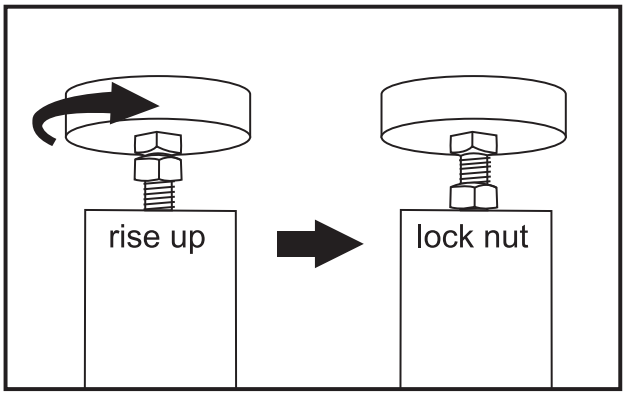

CARE AND CLEANING

- Check all nuts and screws periodically for tightness. When required tighten them.
- Periodically clean the surface of the workbench with a soft damp rag and dry it with a dry one.
- Do not allow chemicals, water, or other substances to remain on the wood top for extended periods of time to reduce the risk of damage to the wood.

CUSTOMER SERVICE

If you are having difficulty in using this product and require support, please send an email to service @great- startools.com or call 877-876-7562.